



DIMENSIONS

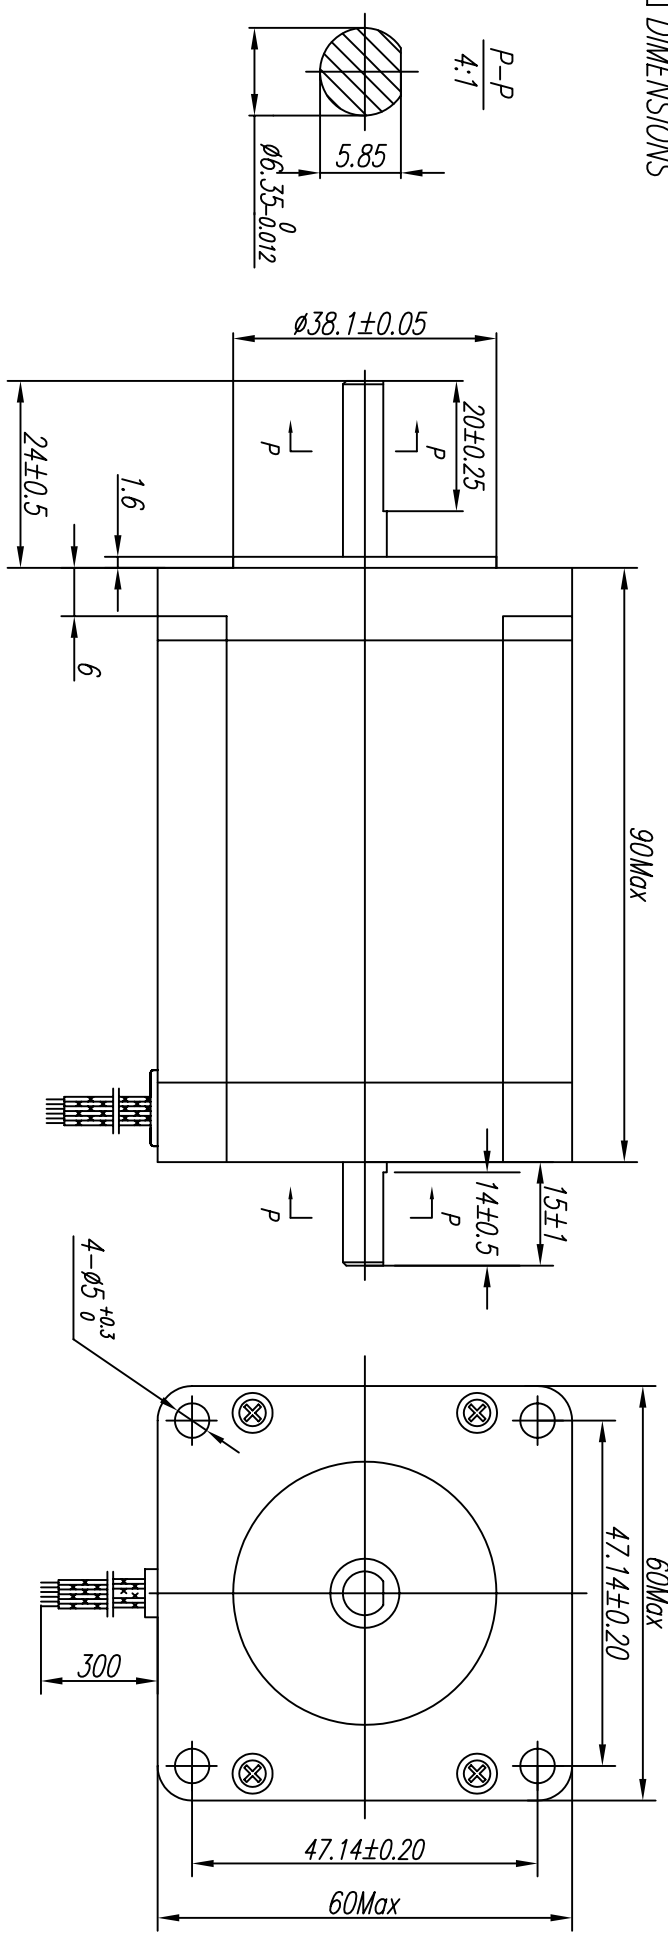

SPECIFICATIONS unit=mm

PHASE	2	PHASE	
STEP ANGLE	1.8±5%	*/STEP	
DETENT TORQUE	6.5	N.cm Max	
INSULATION CLASS	B		
LEAD STYLE	AWG22 UL1007		

COLORS OF LEAD WIRES BIPOLAR & UNI-POLAR

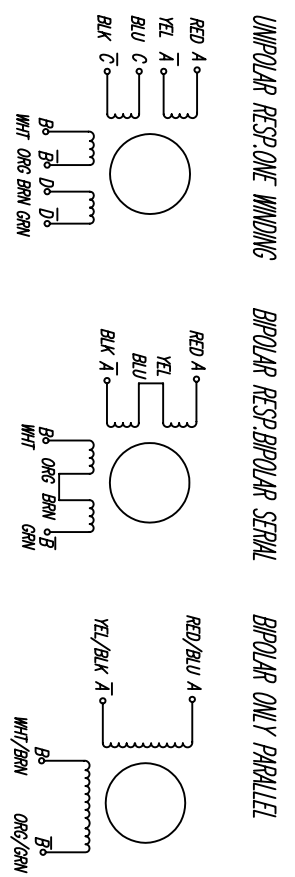

CURRENT	3.5	A/PHASE	2.5	A/PHASE	5.0	A/PHASE
RESISTANCE	1.2 ±10%	Ω/PHASE	2.4 ±10%	Ω/PHASE	0.6 ±10%	Ω/PHASE
INDUCTANCE	2.1 ±20%	mH/PHASE	8.4 ±20%	mH/PHASE	2.1 ±20%	mH/PHASE
HOLDING TOGQUE	215	N.cm Min	300	N.cm Min	300	N.cm Min

REV	QTY.	NO.	CHECK	SIG.	DT.	24H290-35-8B	SPECIFICATION
DESIGN			APPR.				
PROC.						MS MOTOR	SPECIFICATION